

Flachfolie - flat film


TOSS[®]



Schonende Kleinteileverpackung in große Umbeutel
Small parts carefully packed in large bags


Schonende Kleinteileverpackung in große Umbeutel Small parts carefully packed in large bags

Maschinentyp SF 450

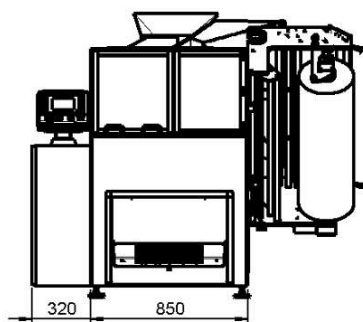

Technische Änderungen, Druckfehler und Irrtümer vorbehalten
Kundenspezifische Ausführung

Machine type SF 450

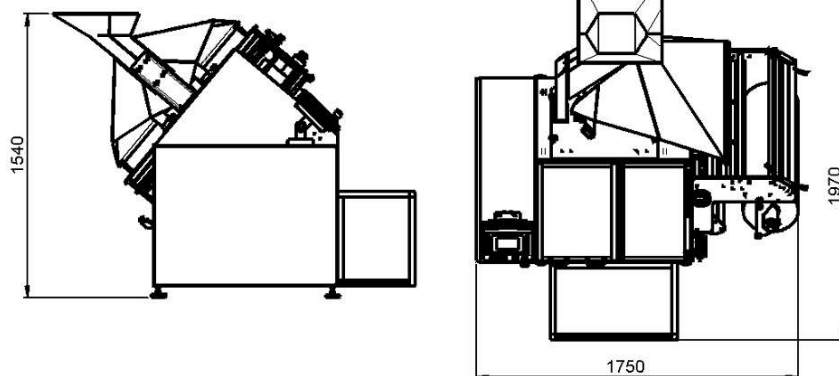

Subject to technical modifications, printing or errors
Special version by request of the customer

TOSS Typ SF 450

- niedrige Einfüllhöhe: nur ca. 1550mm
- großes Beutelvolumen bei kompakter Bauweise
- schräge Bauweise für produkt-schonendes Gleiten in den Beutel
- bedienfreundlich, sicher im Betrieb
- kontinuierliche Bandschweißung
- Backenschließsicherung:
keine Schweißung bei Produkten in der Naht
- Folienlaufkorrektur: kein seitliches Verlaufen

Für niedrigere Stillstandszeiten, dafür hohe Verfügbarkeit:

- Schneller, einfacher Formatwechsel
- Folienrolle wird einseitig aufgeschoben und mechanisch gespannt
- Rollenwechsel in weniger als 5 min
- minutenschneller Heizbandaustausch
- Endlosschweißung mit optimaler Zugänglichkeit
- Folien-Spleißvorrichtung

Technische Daten:

- Beutelbreite: 450mm
- Beutellänge: bis 650mm, stufenlos einstellbar
- Leistung bis zu 30 Beutel pro Minute
- dauerbeheizte Längsschweißung, impulsbeheizte Querschweißung

Optionen:

- Heizband- bzw. Endlosband-Bruchkontrolle:
Maschinenstopp bei Bruch
- Folienendeschalter:
Rollenende = Maschinenstopp
- u. v. m.

TOSS Type SF 450

- low in-feed height: only about 1550mm
- large bag capacity with compact design
- inclined design for product-friendly sliding into the bag
- safe user-friendly machine operation
- continuous band-sealing
- jaw operating safety device:
no sealing of products in the seam
- manual film correction

Reduced down time, increase production:

- quick and simple format change
- mechanic actuated film stretching device
- roll change in less than 5 min
- quick change of heating band
- continuous long sealer with optimum access for service
- film splicing device

Technical data:

- bag width: 450mm
- bag length: up to 650mm, continuously adjustable
- output up to 30 bags per minute
- longitudinal welding continuously heated,
cross welding impulse-heated

Options:

- sealing band- resp. endless band break switch:
automatic machine shut down protection
- end of film roll detection:
automatic machine shut down protection
- and much more